



CLASSIC

90cm & 110cm




Available in Gas, Induction & Dual Fuel
andico.com.au



Specifications - Classic

	90cm Gas	90cm Dual	90cm Induc.	110cm Gas	110cm Dual	110cm Induc.
MODEL NUMBER	CLAS90NGF	CLAS90DFF	CLAS90EI5	CLAS110NGF	CLAS110DFF	CLAS110EI5
WIDTH (MM)	900	900	900	1100	1100	1100
DEPTH EX / INC HANDLES (MM)	608 / 648	608 / 648	608 / 650	600 / 650	600 / 650	605 / 657
HEIGHT - UP TO HOTPLATE (MM)	900 - 930 ^	900 - 930 ^	905 - 930 ^	900 - 930 ^	900 - 930 ^	905 - 930 ^
HOB RATINGS	1 X 3.8 - 15.2MJ*	1 X 3.8 - 15.2MJ*	3 X 1.85kW	1 X 3.8 - 15.2MJ*	1 X 3.8 - 15.2MJ*	3 X 1.85kW
MJ - MEGAJOULES - GAS	1 X 3.0 - 12.3MJ	1 X 3.0 - 12.3MJ	2 X 1.15kW	1 X 3.0 - 12.3MJ	1 X 3.0 - 12.3MJ	2 X 1.15kW
KW - KILOWATTS - INDUCTION	2 X 1.55 - 6.2MJ	2 X 1.55 - 6.2MJ	-	2 X 1.55 - 6.2MJ	2 X 1.55 - 6.2MJ	-
	1 X 0.82 - 3.7MJ	1 X 0.82 - 3.7MJ	-	1 X 0.82 - 3.7MJ	1 X 0.82 - 3.7MJ	-
TOTAL MJ RATING	63.10	43.60	-	72.60	43.6	-
RATED CONNECTED LOAD (kW)	2.55	7.40	14.80	0.24	7.20	14.50
RATED CONNECTED LOAD (AMPS)	11	31	62	1	30	61
ELECTRICAL CONNECTION (AMPS)#	15 AMP PLUG	-	40*	10 AMP PLUG	-	40*
OVEN CAPACITY LITRES* LH / RH	66 / 66	73 / 67	73 / 67	66 / 66	80 / 73	80 / 73
OVEN FUEL LH / RH	GAS / ELECTRIC	ELECTRIC / ELECTRIC	ELECTRIC / ELECTRIC	GAS / GAS	ELECTRIC / ELECTRIC	ELECTRIC / ELECTRIC
OVEN TYPE LH / RH	CONVENTIONAL / FAN	BOTH FAN FORCED	BOTH FAN FORCED	2XCONVENTIONAL	CONVENTIONAL / FAN	CONVENTIONAL / FAN
DUAL CIRCUIT GRILL	GAS	ELECTRIC	ELECTRIC	GAS	ELECTRIC	ELECTRIC
GRIDDLE	SIT-ON	SIT-ON	-	SIT-ON	SIT-ON	-
WOK CRADLE / CAST IRON PAN SUPPORTS	• / •	• / •	-	• / •	• / •	-
BROWNING ELEMENT	-	-	-	-	•	•
WARMING PLATE	-	-	-	•	•	-
FLAME SAFETY DEVICE	•	•	-	•	•	-
ELECTRONIC IGNITION	PUSH BUTTON	PUSH BUTTON	-	PUSH BUTTON	PUSH BUTTON	-
AUTOMATIC HEAT INDICATORS	-	-	•	-	-	•
PAN DETECTOR	-	-	•	-	-	•
RESIDUAL HEAT INDICATORS	-	-	•	-	-	•
CHILD LOCK (HOB)	-	-	•	-	-	•
PROGRAMMABLE CLOCK	• (LH)	• (LH)	• (LH)	• (LH)	• (LH)	• (LH)
CHILD LOCK (OVEN CONTROLS)	• (LH)	• (LH)	• (LH)	• (LH)	• (LH)	• (LH)
MINUTE MINDER	•	•	•	•	•	•
HANDYRACK	•	•	•	•	•	•
DOOR OPENING LH / RH	SIDE / SIDE	SIDE / SIDE	SIDE / SIDE	SIDE / SIDE	SIDE / SIDE	SIDE / SIDE
DOOR TYPE LH / RH	PORTHOLE / SOLID	PORTHOLE / SOLID	PORTHOLE / SOLID	PORTHOLE / PORTHOLE	PORTHOLE / PORTHOLE	PORTHOLE / PORTHOLE
OVEN LIGHT	X 1	X 1	X 1	X 2	X 2	X 2
COOK & CLEAN OVEN LINERS - CATALYTIC	SIDES (LH)	REAR & SIDES (LH)	REAR & SIDES (LH)	SIDES	REAR & SIDES	REAR & SIDES
SLOW COOK	•	•	•	•	•	•
STORAGE DRAWER	-	-	-	•	•	•
FITTINGS AVAILABLE	CHROME	CHROME	CHROME	CHROME	CHROME	CHROME

Choose your colour

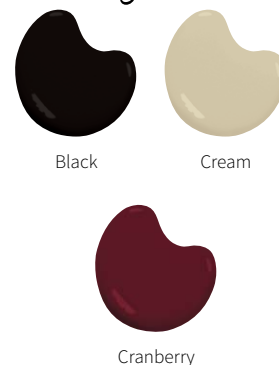

Fuel Types

90cm model Dual Fuel & Gas



90cm model Induction



110cm model Dual Fuel & Gas



110cm model Induction



^ Adjustable height, LH Left hand oven, RH Right hand oven, * Triple ring wok burner, * Litres based on European Standards / Measurements. • = YES, - = NO, ° Preheats oven 30% faster than a fan oven, #Using assessed maximum demand. Not all zones can be used at once. Consult with a licensed electrician.

Every effort is made to ensure all information and specifications within this document is correct and up to date. Due to continuous improvements on both a technical and manufacturing level, this information should be regarded as indicative only.