

ADWFI601

fully-integrated dishwasher







SIZE mm FINISH CAPACITY FEATURES 598Wx550Dx815H

door panel supplied and fitted by builder

CITY 12 place settings

. _ pictor out... igo

- 5 wash programs
- half-load function
- 49 dBA
- electronic controls
- flowmeter water sensor
- antiflood device
- delay start 3/6/9 hours
- height-adjustable top basked
- rinse aid indicator
- natural drying + Extra drying
- VDE inlet hose
- hot (max 90°C) or cold water connection
- inlet hose: 1800mm | outlet hose: 2000mm

NB: kickplate not included

POWER

10 AMP GPO; standard 3-pin plug and cord

240V





Door and kick panels not supplied





| | | TYPE | CYCLE | DETERGENT pre/main gr | DURATION minutes | ENERGY kW/hr | WATER litres | RINSE AID |
|-----------|-----|--|---|--------------------------|---------------------|-----------------|-----------------|--------------|
| intensive | | for heaviest soiled loads, eg pots, pans, casserole dishes, and dried-on food | prewash 50°C wash 65°C rinse/rinse 65°C drying | 5/25 (or tablet) | 170 | 1.8 | 18.5 | V |
| normal | | for heavily soiled loads, eg pots, plates, glasses and lightly soiled pans – standard daily cycle | prewash 45°C wash 55°C rinse/rinse 60°C drying | 5/25 (or tablet) | 160 | 1.4 | 15 | V |
| ECO | ECO | for normally soiled loads, eg plates, glasses, bowls and normally soiled pans | wash 55°C rinse/rinse 50°C drying | 5/25 (or tablet) | 170 | 0.69 | 10.2 | V |
| 90 min | 90′ | for lightly soiled loads such as glasses, crystal and fine china | prewash wash 40°C rinse/rinse 60°C drying | 20 | 90 | 1.2 | 11.5 | √ |
| rapid | Y | a shorter wash for lightly soiled loads that do not need drying | wash 40°C rinse/rinse 45°C | 20 | 30 | 0.6 | 11.5 | |

* AS/NZS 2007.1: Test cycle program
√ Rinse Aid required

EAN 9347777001405


DISCLAIMER


Eurolinx PTY LTD is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cutouts. Distributors, and retailers are not agents of Eurolinx and are not authorized to bind Eurolinx by any express or implied undertaking or representation.




ADWFI601

fully-integrated dishwasher

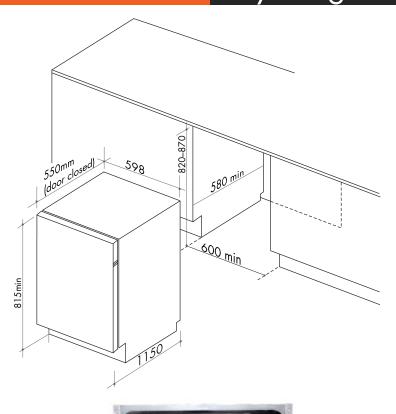

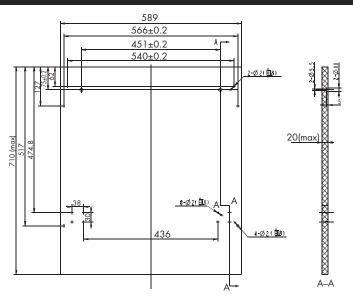






The upper basket is designed to hold more delicate and lighter dishware such as glasses, coffee and tea cups and saucers, as well as small plates and bowls and shallow pans (provid





It is suggested that large items, and items thar are most difficult to clean, are placed in the lower basket — eg pots, pans, lids, serving dishes etc. It is preferable to place serving dishes and lids on the side of the racks to avoid blocking rotation of the top spray arm.

NB: drawings are not to scale — they are to be used. For detailed installation instructions, please refer to user guide.

Australia National Telephone Number 1300 694 583 New Zealand Telephone Number 0508 458 369 ARTUSI showrooms are open Tuesday to Friday from 9am-5pm and Saturdays 10am-4pm

artusi.com.au

NSW & ACT (head office)

02 8569 4699

VIC | SA

CAMBERWELL

03 9809 2155

TASMANIA

QLD

WA | NT

New Zealand

3 Pear Avenue **DERWENT PARK 7009** 03 6272 7386

COORPAROO 07 3397 0850 08 9201 9188