


**crest**

**Smart Lock**

# HEAVY DUTY PADLOCK SHFHDP



**App  
Unlock**



**Finger  
Unlock**



**Rechargeable  
Battery**



**IP64  
Water Resistant**

**tuya<sup>®</sup>**

**crest**  
Smart




Download on the  
**App Store**



GET IT ON  
**Google Play**

## Know your Lock:

1. Lock Shackle
2. LED Indicators
3. Fingerprint Reader
4. Micro-USB Charging Port
5. Keyhole for Supplied Key
6. Lock Body



### Note:

You must set up the master fingerprint via the App, if not, the lock will remain in display/factory mode and will be able to be unlocked with any fingerprint

## Understand your Lock Status:

LED Indicator	Beep Sound	Status / Notifications
<b>BATTERY STATUS INDICATION</b>		
● Flashing Red (after unlocked)		Low Power Alert
● On Red (Solid)		Charging
● Lights Off		Charging
<b>WORKING STATUS INDICATION</b>		
● Flashing Green	Single Beep	Unlocked
● Flashing Red	Single Beep	Unlock Failed
<b>WHEN ADDING FINGERPRINTS</b>		
● On Blue	Single Beep	Waiting for Press
● Flashing Green	Single Beep	Recognized
	Long Single Beep	Fingerprint Registered

## **Specifications:**



Fingerprint Resolution:	120 x 120 DPI
Fingerprint Storage:	10 Sets
Rechargeable Battery:	300mAh Capacity
Input Voltage:	5V DC
Shackle:	10mm Stainless-steel

## **Low Power Alert:**


The indicator LED light on the lock will flash red when the battery is low. Please recharge using a Micro-USB Cable and a 5V DC USB Charger.

## **Warning on Water Resistance:**

**Ensure the lock is not submerged in liquid. A Product with an IP64 Rating is protected against dust and is completely protected against solid objects. It is also protected from water splashing from any angle**

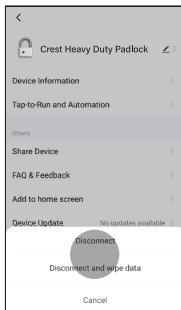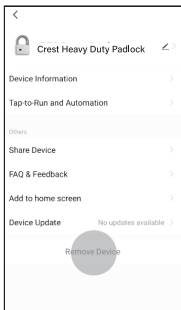

## More Functions:

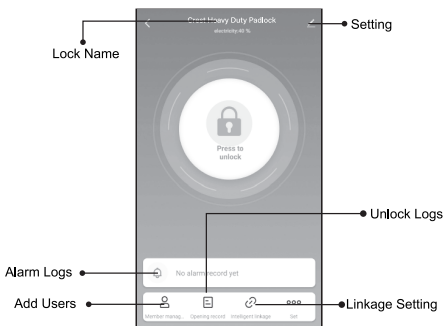

**Alarm Logs:** Wrong fingerprint attempted alarm, battery low power alarm

**Users:** Add/manage/remove family members, friends or visitors (by adding their App Account) to your lock so they will have access to your lock at a designated time period

**Unlock Logs:** A list of unlock records

**Linkage Setting:** You can set “if this then that” linkage on this function

## Download the Mobile App:

You can search Crest Smart in the iOS App Store (Apple) or Google Play Store (Android), or scan the QR code to download Crest Smart App



**Note:** You will need to be within a 5m range for App connection to the lock for initial set up, updates and for normal operation





## Connect your Lock with App:

Step 1: Open the App, register an account


Step 2: Press the fingerprint reader to unlock



Step 3: Tap + on the App

Step 4: Tap "Go to add"

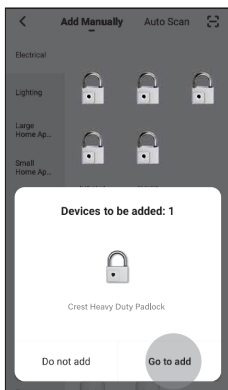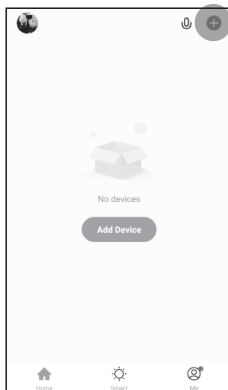


Step 5: Tap NEXT


Step 6: Press and hold  to test lock to App connection

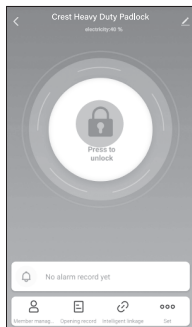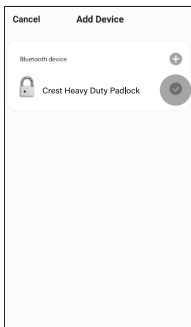



## Add your Fingerprints:

Step 1: Tap  on the bottom-right corner


Step 2: Tap 

Step 3: Tap 

Step 4: Select User

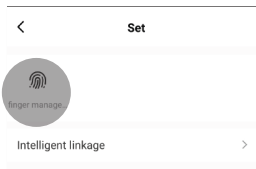

Step 5: Tap  after selecting a user





Step 6: Tap “Start”



Step 7: Press the fingerprint reader (of your lock) several times at slightly different angles until fingerprint is successfully recorded

Step 8: Name the fingerprint you've just added

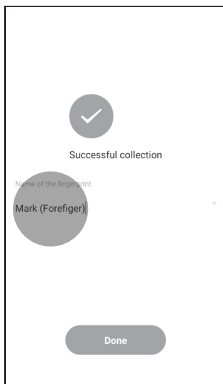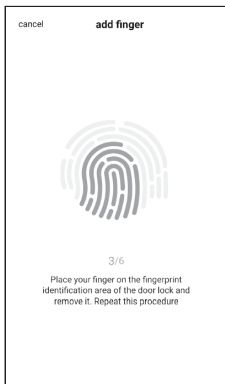

## Disconnect (Reset to Factory Mode):

Step 1: Tap  on the lock's homepage (top-right)

Step 2: Tap “Remove Device”

Step 3: Tap “Disconnect and wipe data”

### NOTE!

**All fingerprints previously set will be deleted if you choose “disconnect and wipe data”.**

Step 4: Tap “Confirm” to disconnect the lock from your App account, the lock is now reset to the display/factory mode and will be able to be unlocked with any fingerprint

Proudly brought to you by:



PO Box 5658 Brendale  
QLD Australia 4500  
Customer Support  
1800 812 261  
[www.crest.com.au](http://www.crest.com.au)

AUSTRALIAN OWNED



Please note, not all options within the App  
maybe be available for the lock due to future  
App and product software updates