

V50DG2E

UNDERBENCH INSTALLATION INSTRUCTIONS


1. Cabinet dimensions:

Height 874mm – 894mm (20mm adjustable feet)

Width 605mm

Depth 598.4mm (tube handle protrudes 40mm beyond this)

2. This cabinet is not designed to be fully integrated behind a joinery door.
3. Please note that a minimum cut out of 625mm is required to facilitate installation, removal and servicing.
4. This cabinet requires 10mm clearance on both sides and top, 40mm clearance at the rear. Where possible a ventilation grid should be installed in the 40mm clearance at the rear (either in the sides, top or back of the joinery). Minimum grid size is 200mm x 40mm.
5. This cabinet is front venting. The cabinet draws air from the rear and expels through the grille under the door at the front. If a kick board is to be placed in front of the ventilation grill at the front a grill must be fitted in to the kick board with a minimum air flow allowance of 150cm².
6. This cabinet has a power switch located on the control panel so power point location is not critical.
7. This cabinet requires a standard 240 volt/10 amp power point.
8. The power cord is 1.9m in length and is fixed on the right side at the back when looking from front of cabinet.
9. As with most appliances of today, this cabinet has sensitive electronic components which are susceptible to damage through lightning and electricity supply faults. It is therefore advised to use a power surge protector to avoid problems of this nature.
10. Please see below detailed dimensional diagram.

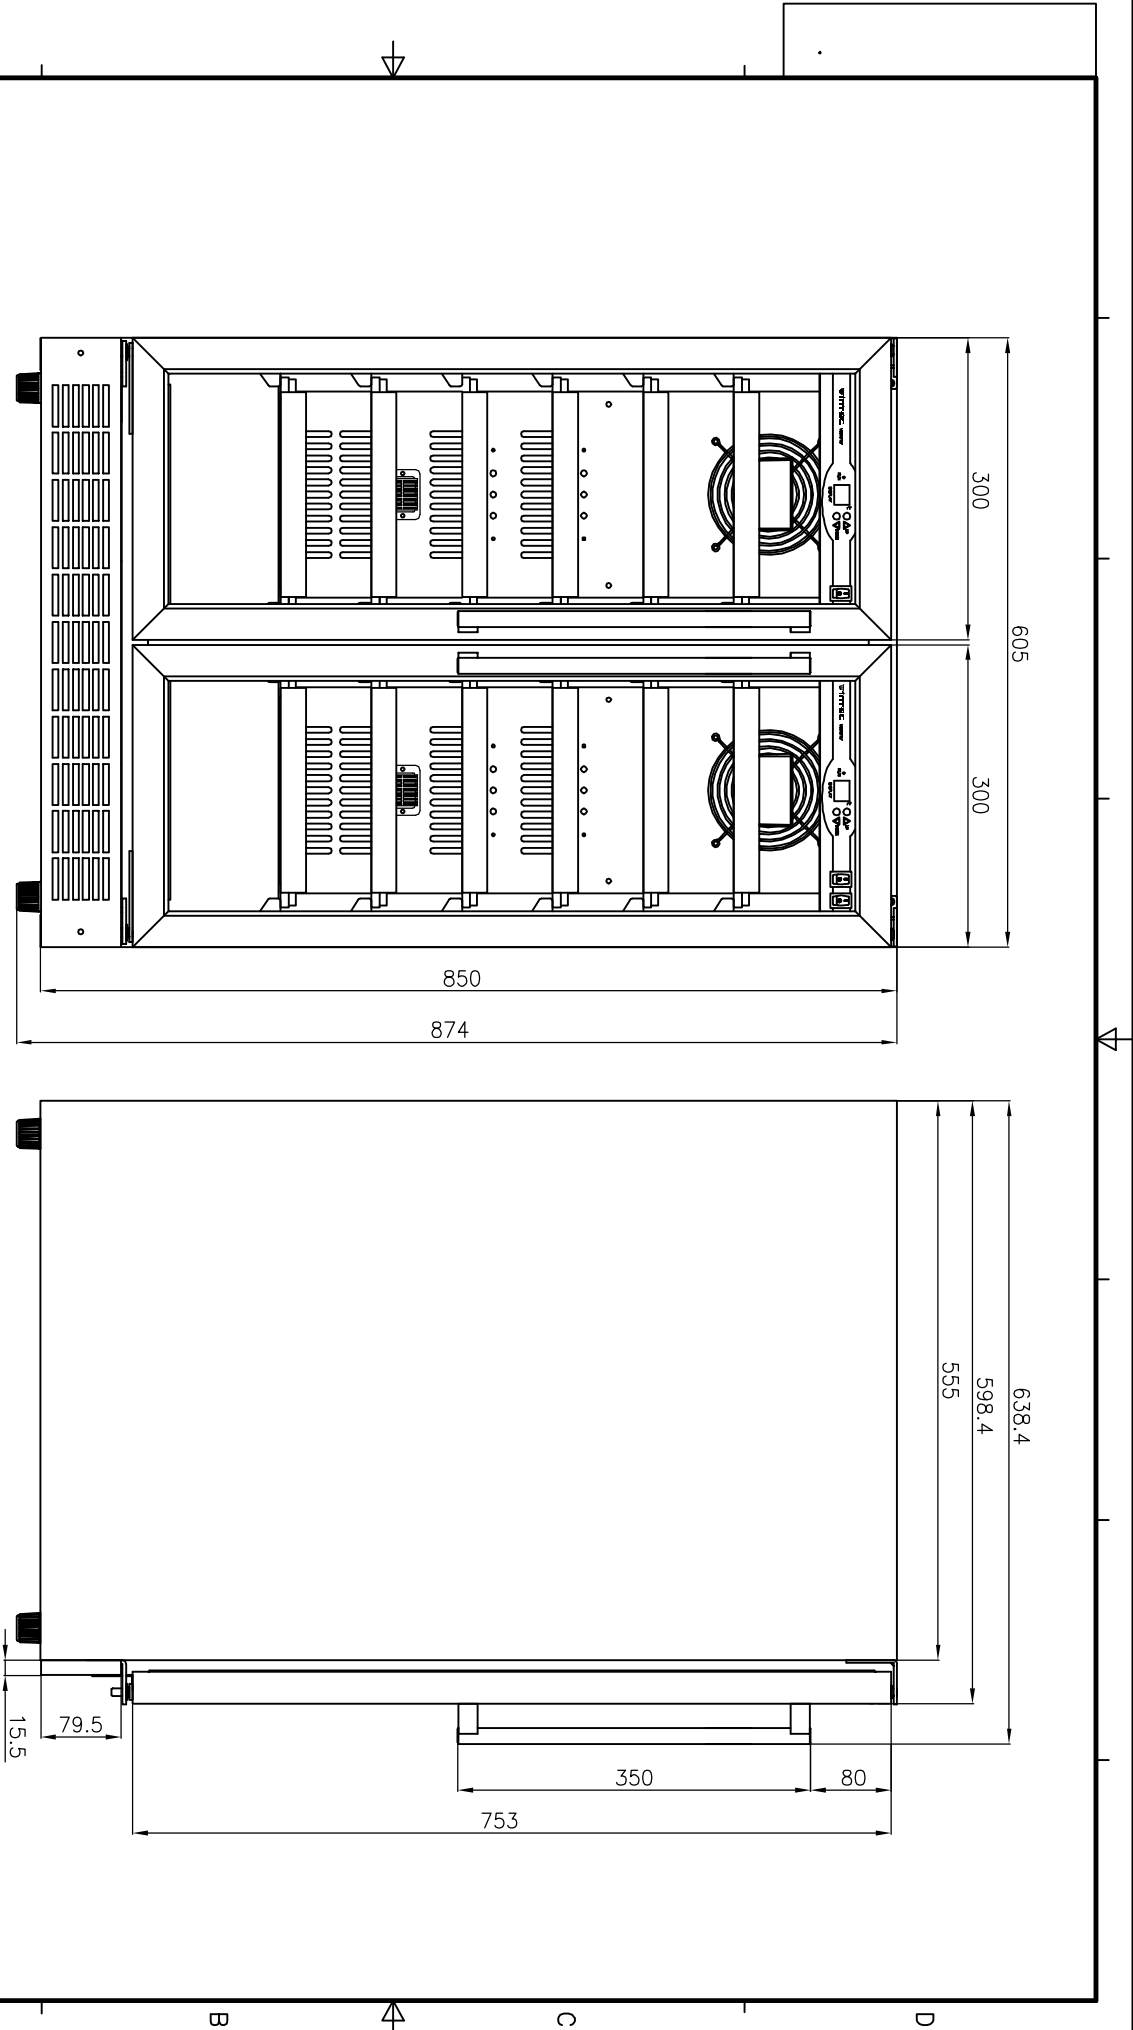

JG50-2D	Vintec V50DG"2e"
新顺翔型号	客户型号

A	正式出图	袁伟雄	2007/07/03
版次	描述	签名	日期

制图	袁伟雄	JG50-2D 总图		比例	1:1	重量	.
工艺	标准化			总 1 页	第 1 页	最新版本	.
审核		材料名称	材料代号	新顺翔电器制造有限公司			
批准		单位	尺寸				
日期	2007/07/03	mm	A4				