

CIR574X

smeg 70cm gas cooktop



finish	satin stainless steel, cast-iron trivets
size	685mmW x 60mmH x 500mmD
capacity	38mj/hour max over four burners — ultra rapid triple burner (15mj/hr) rapid (12.2mj/hr) semi rapid (6mj/hr) auxiliary (4.8mj/hr)
installation	topmount
ignition	automatic electronic
gas input	set for natural gas: regulator supplied adaptable for ULPG: no regulator required <ul style="list-style-type: none"> <li>• ½" BSP gas inlet connection</li> <li>• gas connection located right-hand rear corner</li> <li>• ½" BSP 1.0 kPa natural gas regulator is supplied with natural gas hobs</li> </ul>
power cord	<ul style="list-style-type: none"> <li>• 1.3 metre length connected, suitable for standard 10 amp GPO</li> </ul>
accessories	two cast-iron, heavy-duty trivets for full hob cover, wok stand
supplied	clips, seal, instructions for installation, operation and maintenance
package dimensions	730W x 120H x 560mmD = 0.05m <sup>3</sup>
net weight	12.2kg
gross weight	13.8kg
warranty	two years parts and labour

## 60cm INSTALLATION

Despite occupying nearly 70cm bench space, the installed specification into the bench is only 56cm. This allows easy fitment into predesigned standard 60cm cabinetry and is suitable for much of the replacement gas cooktop market.

## ULTRA-RAPID WOK BURNER

Conveniently and ergonomically positioned on the left, this versatile burner, while being designed for perfect wok cooking, also suits the larger stock pots, saucepans and griddles.

## AUXILIARY BURNER

Also ideally situated, this small multipurpose burner is designed to accommodate even the smallest of utensils, such as a coffee percolator or one-cup espresso maker.

## SIMMER CONTROL

All burners, including the ultra-rapid triple burner, can be adjusted down to a very low, safe flame for the gentlest of low heat simmers.

## ELECTRONIC IGNITION

The cooktop is connected with a power cord of 1.3 metre length to be plugged into a GPO located according to installation needs below the benchline. This supplies a continuous stored charge to spark the gas supply to the individual burner of your choice. Simply depress and turn the control of the desired cooking zone for flame ignition.

## LOW MAINTENANCE


The seamless hob design allows for easy wipe-over cleaning and generous catchment of spills and accidental boilovers. The control knobs, also, are removable for cleaning access. Trivets, burner assemblies and wok stand can be washed in warm soapy water.

## INSTALLATION



With only a 32mm displacement into the benchtop, the cooktop allows for easy installation underbench of either oven, dishwasher, cupboards or drawers.

CIR574X

smeg 70cm gas cooktop

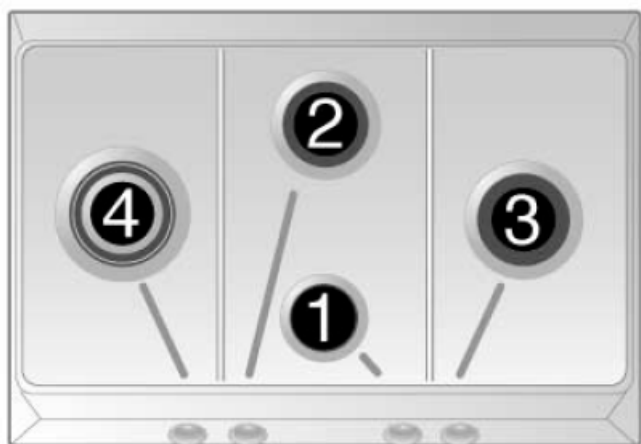

number	burner	mj/hr	pot size Øcm
1	auxiliary	4.8	12 – 14
2	semi rapid	6	16 – 20
3	rapid	12.2	22 – 26
4	ultra rapid	15	22 – 26

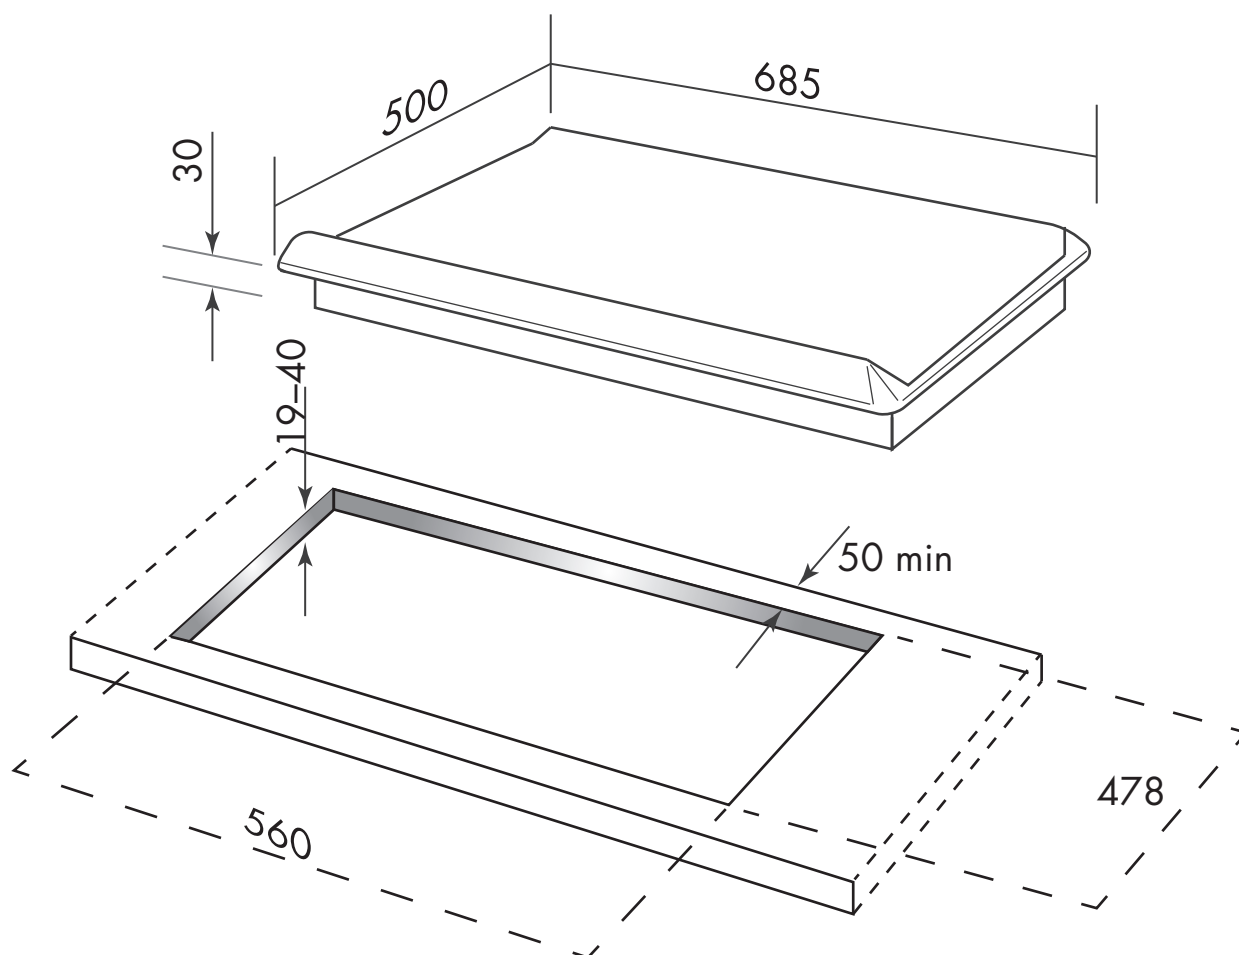

**PLEASE NOTE:** drawings are not to scale. They are to assist only.