

features



- Stainless Steel front fascia panel with grey end caps
- White front fascia panel with white end caps
- 440m³/hr
- Twin motor
- Ducted operation
- Re-circulating operation (through cupboard only)
- 3 speed fan, controlled by slide switches
- Aluminium grease filters washable
- 2 x 40 watt halogen lamps


specifications

| | |
|-----------------------------|---|
| Airflow: | 440m ³ /hr |
| Noise level: | 56 dBA on maximum setting |
| Lighting: | 2 x 40 watt halogen |
| Motor wattage | 120 watt |
| Power: | 240 volt / 50Hz (fitted with 10amp, 3 pin plug) |
| Power Cord: | 1.5 metre cable |
| Ducting Spigot size: | 120mm |

dimensions

Product Dimensions 600mm (W) x 175mm (H) x 280mm* (D) (*not including 20mm front fascia panel)

Cut Out Dimensions 551mm (W) x 135mm (H) x 280mm[#] (D) (# cabinet only)

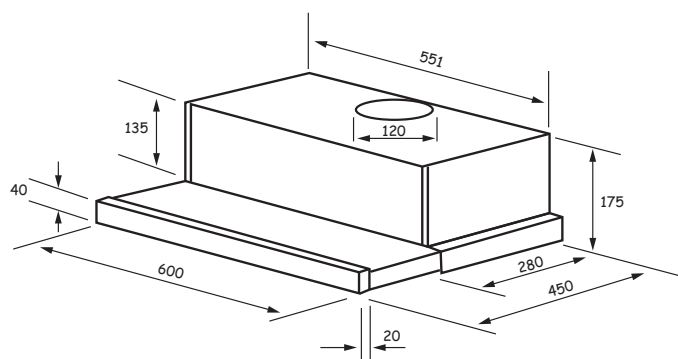


Warranty

2 years Parts and Labour

Customer Service

Our Nationwide Service Team can be contacted on our Toll Free Customer Service Number 1800 805 300 or by logging on to <http://customersupport.hapl.com.au/>

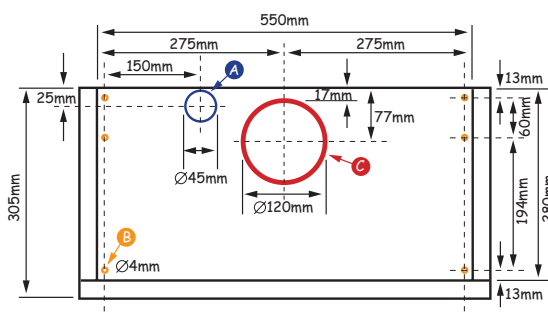

- A** Hole x 1 = position and size (45mm dia.) in shelf above rangehood for power cord
B Holes x 6 = position and size (4mm dia.) in shelf above for fixing of hood with washers and screws supplied
C Hole x 1 = position and size (120mm dia.) in shelf above for ducting pipe