


ST4648

Smeg 45cm fully-integrated dishwasher

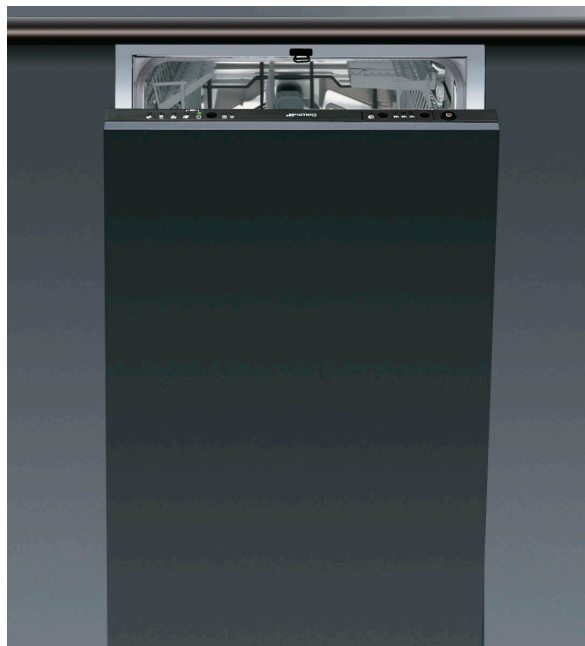


<b>installation</b>	fully-integrated into cabinetry
<b>dimensions</b>	818-868mmH x 448mmW x 550mmD (excluding door)
<b>capacity</b>	10 place settings (IEC international)
<b>wash action</b>	two wash arms — lower arm with shuttle system
<b>programs</b>	four wash cycles one exclusive rinse selection
<b>delay start</b>	3-hour, 6-hour, 9-hour selections
<b>wash temperatures</b>	45°C, 55°C, 65°C and 70°C rinses at ambient, 68°C and 70°C
<b>half load</b>	top basket on four wash programs, separate cutlery basket
<b>baskets</b>	2 x graphite: top baskets tilts for larger plate placement below
<b>water connection</b>	cold or hot
<b>drying</b>	residual heat hot air
<b>quietness</b>	53 dBA sound pressure at main (wash) motor 38 dB installed and operating
<b>anti-flood</b>	five-stage water security
<b>noise level</b>	48 dB
<b>water usage</b>	13 litres on ECO program
<b>motors</b>	wash/rinse motor 150 watt drain pump 20 watt heating element 2100 watt concealed
<b>accessory</b>	worktop/lid fitted — removable
<b>warranty</b>	two years parts and labour

#### SAVE ON ENERGY AND PROTECT THE ENVIRONMENT

- always try to run the dishwasher **fully loaded**
- do not wash dishes in running water
- use the washing program that is **most appropriate** for each type of load
- do not carry out any preliminary rinsing
- if available, connect the dishwasher to a hot water supply up to 60°C


The phosphates contained in dishwasher detergents are harmful to the environment. To avoid using excessive amounts of detergent and to save on electricity, observe the following:

- separate** the more delicate items from dishes that are more resistant to aggressive detergents and high temperatures;
- do not** pour the detergent directly onto the dishes



#### 5-STAGE FILTRATION SYSTEM

The ultimate dishwasher filtration system — traps food and prevents it from entering the wash system, thus maintaining a high-quality wash




#### SHUTTLE SYSTEM






Because of the rectangular shape of the 45cm dishwasher, Smeg has developed a system whereby the lower arm is 'shuttled' from front to back on a secondary supporting arm. This ensures optimum water distribution throughout.

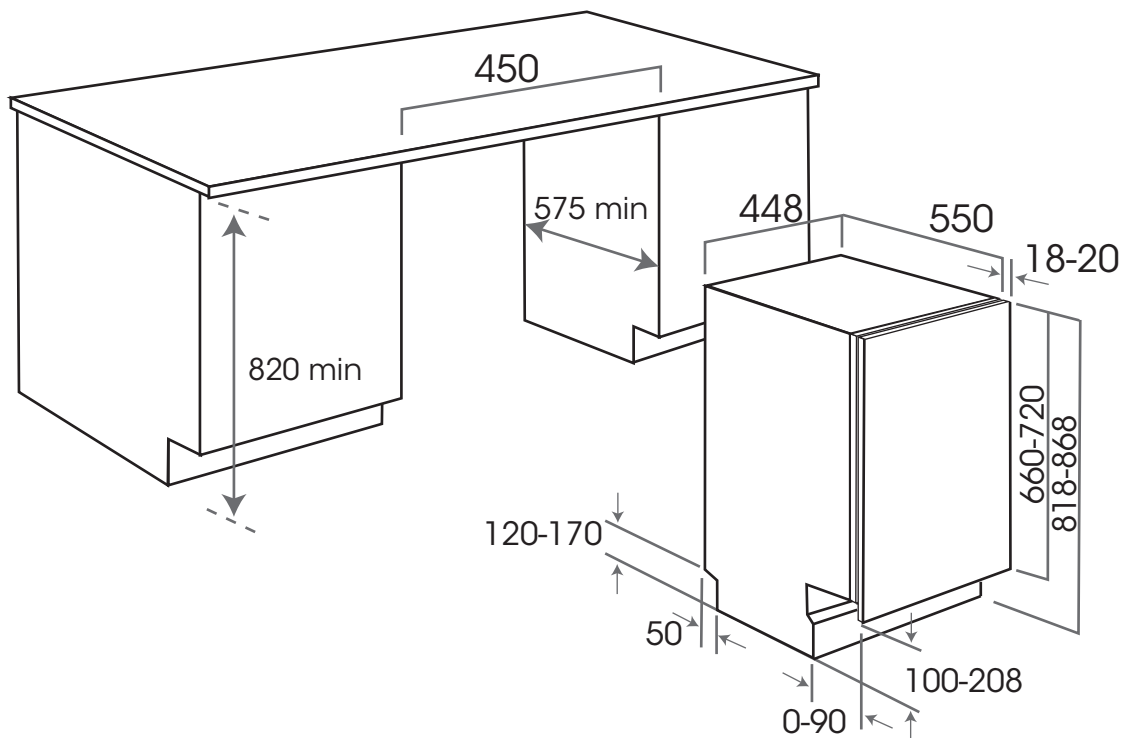

STA4648A

Smeg 45cm fully-integrated dishwasher



Program			Load	Program progress	Duration	Consumption	
					minutes	water litres	power kW
1		soak	pans and dishes awaiting a further wash	cold prewash	9	5	-
2		delicate	wash immediately after use for dishes with light soiling	wash at 45°C cold rinse rinse at 68°C dry	59	12	0.90
3		ECO	wash immediately after use for dishes with normal soiling	wash at 50°C cold rinse rinse at 65°C dry	125	13	1.01
4		normal	normal soiling	cold prewash wash at 65°C cold rinse rinse at 68°C dry	80	17	1.20
5		intensive	heavily soiled pans and dishes (except delicate items)	prewash at 45°C wash at 70°C 2 x cold rinses rinse at 70°C dry	105	20	1.50