

Thank you for purchasing this Crest TV Wall Mount.

Crest prides itself on supplying quality audio visual accessories to consumers and businesses throughout Australia. If you follow this guide carefully, we are confident this product will help maximise the enjoyment you obtain from your audio visual equipment for many years.

Please keep this guide for future reference.

TECHNICAL SUPPORT

If you have any questions regarding the warranty, installation or use of this product, please contact our Technical Support Centre on 1800 812 261.

INSTALLATION INSTRUCTIONS

IMPORTANT

1. Installation of this TV mount will be easier if two people are involved.
2. Some images in this guide may vary slightly from the actual components supplied.
3. Ensure this Installation Guide is completely read and understood before attempting installation.
4. Mount **MUST NOT** be installed solely in plasterboard, fibre cement and similar surfaces.
5. Mount **MUST** be installed in sound supporting structures such as those made of timber, steel or masonry using appropriate fasteners.
6. The supporting structure must be capable of sustaining the combined weight of the TV mount and the display otherwise the structure must be reinforced.
7. The fasteners supplied in this hardware pack allow for fixing into timber and masonry only. If installing into a supporting structure made of steel, appropriate fasteners must be used and sourced from an appropriate supplier.
8. Use appropriate tools and safety equipment and ensure adequate ventilation during installation.
9. If uncertain about any aspect of installation, contact Crest or an installation professional.

WARRANTY

This Crest TV Wall Mount carries a limited warranty of five (5) years from the date of purchase.

Crest, by this warranty, will at its discretion repair or replace the product or its components if found to be defective in workmanship or materials.

Where a warranty claim is made, Crest may require the customer at their expense to return the product and or its components to Crest or a Crest representative for inspection.

This limited warranty covers supply of the replacement product (which may vary from the one originally purchased) only and does not extend to, nor covers costs associated with, demounting, removal, disposal or return of the original product, or installation of the replacement product.

This limited warranty does not cover damage or loss resulting from intentional or unintentional misuse, tampering with, neglect or incorrect installation or use of this product or where the product has been used for purposes other than that for which it is designed or for supporting displays beyond the product's capability as stated on the product's original packaging and in this guide.

Failure to strictly comply with this installation guide may result in forfeiture of the warranty by the purchaser, user or owner.

Any warranty claim must be accompanied by proof of purchase showing date and location of purchase.

TV COMPATIBILITY SPECIFICATIONS

Note the TV Compatibility Specification of each mount.

CAFP110F This model will suit most flat panel TV sizes from **24 to 42 inches (61 to 106cm)** as long as they weigh **50kg maximum** and possess a maximum mounting hole pattern of **410 x 505mm** (h x w)

CAFP2F This model will suit most flat panel TV sizes from **37 to 65 inches (94 to 165cm)** as long as they weigh **75kg maximum** and possess a maximum mounting hole pattern of **510 x 805mm** (h x w)

TOOLS REQUIRED

Drywall (Timber Frame) Installation

- Stud finder
- Spirit level
- Pencil
- Drill
- Phillips head screwdriver
- 5 or 6mm high speed drill bit
- Adjustable spanner

If Installing in Masonry, you will also need:

- Drill with hammer function
- 10mm masonry drill bit
- Hammer

WALL MOUNT FASTENERS DIAGRAM

Bag #	(Ref) Item (Qty)		
1	 (A) M4x12 Bolt (x4)	 (B) M4x30 Bolt (x4)	 (C) M4 Lock Washer (x4)
2	 (D) M5x12 Bolt (x4)	 (E) M5x30 Bolt (x4)	 (F) M5 Lock Washer (x4)
3	 (G) M6x12 Bolt (x4)	 (H) M6x35 Bolt (x4)	 (I) M6 Lock Washer (x4)
4	 (J) M8x16 Bolt (x4)	 (K) M8x40 Bolt (x4)	 (L) M8 Lock Washer (x4)
5	 (M) Small Spacer (x4)	 (N) Large Spacer (x4)	 (O) M6 Washer (x4)
6	 (P) Concrete Anchor (x6)	 (Q) M8x63 Lag Bolt (x6)	 (R) Lag Bolt Washer (x6)



165 South Pine Rd
PO Box 5658
Brendale
QLD 4500

STEP 1 – ATTACH WALL PLATE TO WALL

A. Installing in Drywall (Timber frame)

1. Locate centre of timber studs using stud finder.
2. Mark a minimum of four fixing holes (one at top and bottom at either end of wall plate) over stud centres using wall plate as guide. Ensure plate is level.
3. Predrill holes to a depth of 55mm using high speed drill bit.
4. Attach wall plate using lag bolts (Q) through lag bolt washers (R). Do not over tighten. See Figure 1.

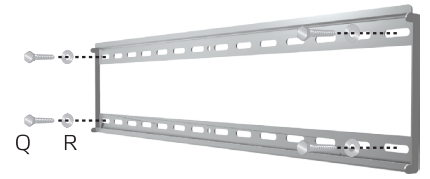


Figure 1 – Attach wall plate to wall.

B. Installing in Masonry

1. Mark a minimum of four (preferably six) fixing holes using wall plate as guide. Ensure plate is level.
2. Predrill holes to a depth of 65mm using 10mm masonry bit. Clean out holes.
3. Fully insert masonry anchors (P). Tap in with hammer if required. See Figure 2.
4. Attach wall plate by inserting lag bolts (Q) through lag bolt washers (R) into masonry anchors (P) and tighten. Do not over tighten. See Figure 3.




Figure 2 – Insert masonry anchors.

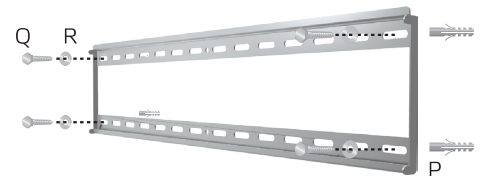


Figure 3 – Attach wall plate to wall.

STEP 2 – ATTACH ARMS TO TV

1. Use correct bolt size (A, D, G or J) with corresponding lock washers (C, F, I or L) through round washers (O) to attach arms to rear of TV. Use longer bolts (B, E, H, or K) and plastic spacers (M or N), if rear of TV is curved or recessed. Note that M8 bolts do not require a round washer. To avoid damaging TV, do not over tighten bolts. See Figure 4.

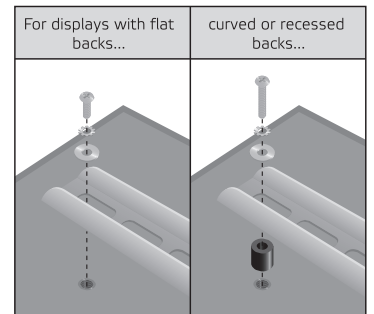


Figure 4 – Attach Arms to Rear of TV.

STEP 3 – MOUNT TV ON WALL PLATE

1. With help of another person, carefully lift TV and hook arms over wall plate. See Figure 5.
2. Insert safety bar and install padlock (not supplied) to prevent theft. See Figure 6.

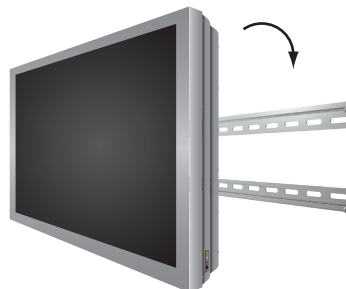


Figure 5 - Carefully hook arms and TV over wall plate.



Figure 6 – Install safety bar and padlock.